

- Unique easy to fit design
- Gold plated pin
- Nickel plated body
- IEC60169-8
- CECC22120
- Crimp sleeve
- Kemo KNCAB3 (RG174) cable
- Kemo KLNCAB2 low noise cable
- Kemo KNCAB2 IEPE cable




Dimensions in mm

The KBNC-P is a high-quality BNC crimp plug for RG174 cable

Used by Kemo Ltd as its primary BNC connector on all its cable assemblies, this connector can also be purchased as a self-fit connector to make your own cable assemblies.

Stock item

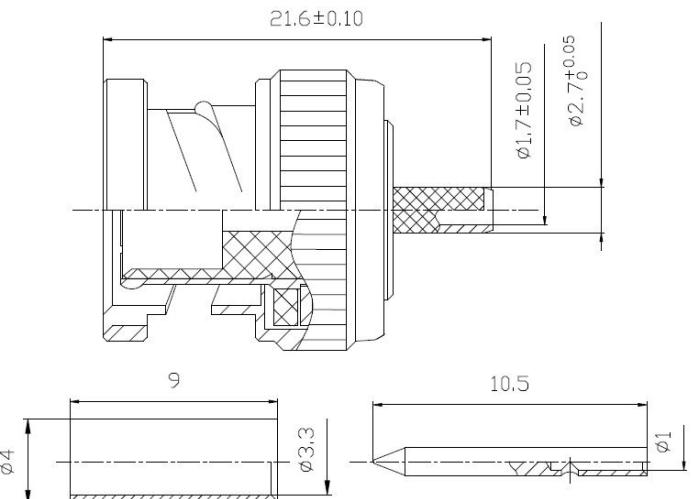

Note: Kemo strain relief boot not supplied in self-fit kit, heat shrink, is recommended as substitute. Suitable Kemo coloured strain relief boots can be ordered separately.

Variable	Value
Electrical	
Impedance	50Ω
Frequency Range	0 ~ 3GHz
Working Voltage (max.)	500V max
Withstand Voltage	1500Vrms
Insulation Resistance	≥5000MΩ
VSWR (Voltage Standing Wave Ratio)	≤1.22
Physical	
Body	Nickel Plated Brass
Centre Conductor	Gold plated brass
Insulator	PTFE
Crimping body	Nickel plated copper alloy
Temperature Range	-55°C to +155°C
Durability	>500 connections

Due to continued product development Kemo Limited reserve the right to change specification without notice.

Kemo Limited

First Floor, 33 King Street, Thetford, Norfolk, IP24 2AW, United Kingdom

+44 (0)1474 705168

www.kemo.com sales@Kemo.com